

COAXIAL CABLES



50 ohm Corrugated Copper-tube Outer Conductor Coaxial Cables for Wireless Communication

Fire retardant Jacket: HCAHYZ-50-9(1/2" S LSZH)



1/2" Super flexible Coaxial Cable

Characteristics

Low Attenuation, low VSWR,
 High expansion, high power rating,
 Excellent environmental performance
 and Mechanical Performance.

1/2" S fire retardant cable fulfills the
 requirements of CPR Class B2ca-s1-d1-a1

Construction

Inner conductor	
Copper Clad Aluminum	
Diameter (mm)	3.60±0.10
Insulation	
3 layers of Insulation	Foam PE
Diameter (mm)	9.70±0.40
Outer conductor	
Corrugated Copper-tube	
Outer conductor (mm)	12.00±0.25
Jacket	
Thickness (mm)	0.80±0.20
Diameter (mm)	13.40±0.20

Electrical Performance

Impedance (Ω)	50±1		
Capacitance (pF/m)	82		
Inductance (uH/m)	0.205		
Velocity (%)	84		
Dc Breakdown, volts (V)	≥2500		
Peak Power(kW)	16		
Shielding Effectiveness (dB)	≥120		
Insulation Resistance(MΩ.km)	5000		
Cut-off Frequency (GHz)	10.2		
Frequency (MHz)	Return Loss(dB)	Attenuation (dB/100m)	Average Power (kW)
150 MHz	21.5	4.06	2.49
450 MHz	21.5	7.25	1.38
800 MHz	23	9.90	1.01
900 MHz	23	10.52	0.95
1800 MHz	23	15.55	0.63
2000 MHz	23	16.51	0.60
2500 MHz	23	18.77	0.53
3000 MHz	21	20.86	0.47
3400 MHz	21	22.45	0.44
3600 MHz	21	23.22	0.43
3700 MHz	21	23.60	0.42
3800 MHz	21	23.98	0.41
4000 MHz	19	24.72	0.39
4800 MHz	19	27.57	0.34
4900 MHz	19	27.91	0.34
5000 MHz	19	28.25	0.34

Seisen S. L.

C/ Rafael Pillado N°30

Bloque 3, nave 10, Polígono Industrial Río de Janeiro

28 010 Madrid, Spain

Telf.: + 34 91 653 21 75

Fax: + 34 91 654 53 93

**Engineering data**

Minimum Bending Radius (mm)	
Single Bending	25
Multiple Bending	30
Number of bends	15
Temperature range (°C)	
Standard jacket	-40~+70
Fire Retardant Jacket	-25~+70

Standard Conditions:

For attenuation: VSWR 1.0, cable temperature 20°C

For average power: VSWR 1.0, ambient temperature 40°C

Inner conductor temperature 100°C. No solar loading.

Maximum return loss and attenuation value shall be 105% of the nominal value.

50 ohm Corrugated Copper-tube Outer Conductor Coaxial Cables for Wireless Communication

Normal Jacket: HCAHY-50-9 (1/2" S)



1/2" Super flexible Coaxial Cable

Characteristics

Low Attenuation, low VSWR,
 High expansion, high power rating,
 Excellent environmental performance
 and Mechanical Performance.

Construction

Inner conductor	
Copper Clad Aluminum	
Diameter (mm)	3.60±0.10
Insulation	
3 layers of Insulation	Foam PE
Diameter (mm)	9.70±0.40
Outer conductor	
Corrugated Copper-tube	
Outer conductor (mm)	12.00±0.25
Jacket	
Thickness (mm)	0.80±0.20
Diameter (mm)	13.40±0.20

Electrical Performance

Impedance (Ω)	50±1		
Capacitance (pF/m)	82		
Inductance (uH/m)	0.205		
Velocity (%)	84		
Dc Breakdown, volts (V)	≥2500		
Peak Power(kW)	16		
Shielding Effectiveness (dB)	≥120		
Insulation Resistance(MΩ.km)	5000		
Cut-off Frequency (GHz)	10.2		
Frequency (MHz)	Return Loss(dB)	Attenuation (dB/100m)	Average Power (kW)
150 MHz	21.5	4.06	2.49
450 MHz	21.5	7.25	1.38
800 MHz	23	9.90	1.01
900 MHz	23	10.52	0.95
1800 MHz	23	15.55	0.63
2000 MHz	23	16.51	0.60
2500 MHz	23	18.77	0.53
3000 MHz	21	20.86	0.47
3400 MHz	21	22.45	0.44
3600 MHz	21	23.22	0.43
3700 MHz	21	23.60	0.42
3800 MHz	21	23.98	0.41
4000 MHz	19	24.72	0.39
4800 MHz	19	27.57	0.34
4900 MHz	19	27.91	0.34
5000 MHz	19	28.25	0.34

Seisen S. L.

C/ Rafael Pillado N°30

Bloque 3, nave 10, Polígono Industrial Río de Janeiro

28 010 Madrid, Spain

Telf.: + 34 91 653 21 75

Fax: + 34 91 654 53 93

**Engineering data**

Minimum Bending Radius (mm)	
Single Bending	25
Multiple Bending	30
Number of bends	15
Temperature range (°C)	
Standard jacket	-40~+70
Fire Retardant Jacket	-25~+70

Standard Conditions:

For attenuation: VSWR 1.0, cable temperature 20°C


For average power: VSWR 1.0, ambient temperature 40°C

Inner conductor temperature 100°C. No solar loading.

Maximum return loss and attenuation value shall be 105% of the nominal value.

50 ohm Corrugated Copper-tube Outer Conductor Coaxial Cables for Wireless Communication

Fire retardant Jacket: HCAAYZ-50-12(1/2"retardant)

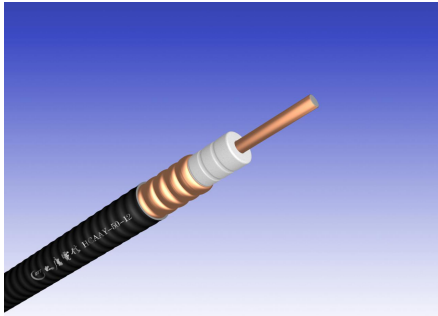

1/2" Flexible Coaxial Cable

Characteristics

Low Attenuation, low VSWR,
 High expansion, high power rating,
 Excellent environmental performance
 and Mechanical Performance.
 1/2" fire retardant cable fulfills the
 requirements of CPR Class B2ca-s1-d1-a1

Construction

Inner conductor	
Copper Clad Aluminum	
Diameter (mm)	4.80±0.10
Insulation	
3 layers of Insulation	Foam PE
Diameter (mm)	12.20±0.20
Outer conductor	
Corrugated Copper-tube	
Outer conductor (mm)	13.80±0.25
Jacket	
Thickness (mm)	1.00±0.20
Diameter (mm)	15.70±0.20

Electrical Performance

Impedance (Ω)	50±1		
Capacitance (pF/m)	76		
Inductance (uH/m)	0.19		
Velocity (%)	88		
Dc Breakdown, volts (V)	≥4000		
Peak Power(kW)	40		
Shielding Effectiveness (dB)	≥120		
Insulation Resistance(MΩ.km)	5000		
Cut-off Frequency (GHz)	8.8		
Frequency (MHz)	Return Loss(dB)	Attenuation (dB/100m)	Average Power (kW)
150 MHz	21.5	2.65	2.83
450 MHz	21.5	4.73	1.59
800 MHz	23	6.44	1.17
900 MHz	23	6.84	1.10
1800 MHz	23	10.08	0.73
2000 MHz	23	10.70	0.71
2500 MHz	23	12.14	0.62
3000 MHz	21	13.48	0.56
3400 MHz	21	14.49	0.52
3600 MHz	21	14.98	0.50
3700 MHz	21	15.23	0.49
3800 MHz	21	15.46	0.48
4000 MHz	19	15.94	0.47
4800 MHz	19	17.75	0.42
4900 MHz	19	17.97	0.42
5000 MHz	19	18.18	0.42

Seisen S. L.

C/ Rafael Pillado N°30

Bloque 3, nave 10, Polígono Industrial Río de Janeiro

28 010 Madrid, Spain

Telf.: + 34 91 653 21 75

Fax: + 34 91 654 53 93



Engineering data	
Minimum Bending Radius (mm)	
Single Bending	70
Multiple Bending	125
Number of bends	15
Temperature range (°C)	
Standard jacket	-40~+70
Fire Retardant Jacket	-25~+70

Standard Conditions:

For attenuation: VSWR 1.0, cable temperature 20°C

For average power: VSWR 1.0, ambient temperature 40°C

Inner conductor temperature 100°C. No solar loading.

Maximum return loss and attenuation value shall be 105% of the nominal value.


Seisen S. L.

C/ Rafael Pillado Nº30
 Bloque 3, nave 10, Polígono Industrial Río de Janeiro
 28 010 Madrid, Spain
 Telf.: + 34 91 653 21 75
 Fax: + 34 91 654 53 93



50 ohm Corrugated Copper-tube Outer Conductor Coaxial Cables for Wireless Communication

Normal Jacket: HCAAY-50-12 (1/2")

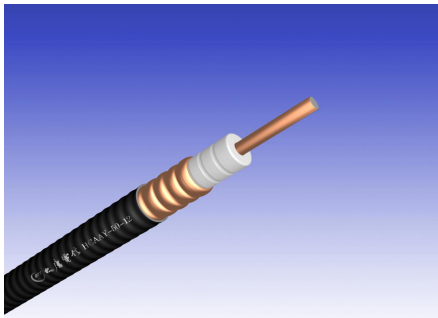

1/2" Flexible Coaxial Cable

Characteristics

Low Attenuation, low VSWR,
 High expansion, high power rating,
 Excellent environmental performance
 and Mechanical Performance.

Construction

Inner conductor	
Copper Clad Aluminum	
Diameter (mm)	4.80±0.10
Insulation	
3 layers of Insulation	Foam PE
Diameter (mm)	12.20±0.20
Outer conductor	
Corrugated Copper-tube	
Outer conductor (mm)	13.80±0.25
Jacket	
Thickness (mm)	1.00±0.20
Diameter (mm)	15.70±0.20

Electrical Performance

Impedance (Ω)	50±1		
Capacitance (pF/m)	76		
Inductance (uH/m)	0.19		
Velocity (%)	88		
Dc Breakdown, volts (V)	≥4000		
Peak Power(kW)	40		
Shielding Effectiveness (dB)	≥120		
Insulation Resistance(MΩ.km)	5000		
Cut-off Frequency (GHz)	8.8		
Frequency (MHz)	Return Loss(dB)	Attenuation (dB/100m)	Average Power (kW)
150 MHz	21.5	2.65	2.83
450 MHz	21.5	4.73	1.59
800 MHz	23	6.44	1.17
900 MHz	23	6.84	1.10
1800 MHz	23	10.08	0.73
2000 MHz	23	10.70	0.71
2500 MHz	23	12.14	0.62
3000 MHz	21	13.48	0.56
3400 MHz	21	14.49	0.52
3600 MHz	21	14.98	0.50
3700 MHz	21	15.23	0.49
3800 MHz	21	15.46	0.48
4000 MHz	19	15.94	0.47
4800 MHz	19	17.75	0.42
4900 MHz	19	17.97	0.42
5000 MHz	19	18.18	0.42

Seisen S. L.

C/ Rafael Pillado N°30

Bloque 3, nave 10, Polígono Industrial Río de Janeiro

28 010 Madrid, Spain

Telf.: + 34 91 653 21 75

Fax: + 34 91 654 53 93



Engineering data	
Minimum Bending Radius (mm)	
Single Bending	70
Multiple Bending	125
Number of bends	15
Temperature range (°C)	
Standard jacket	-40~+70
Fire Retardant Jacket	-25~+70

Standard Conditions:

For attenuation: VSWR 1.0, cable temperature 20°C


For average power: VSWR 1.0, ambient temperature 40°C

Inner conductor temperature 100°C. No solar loading.

Maximum return loss and attenuation value shall be 105% of the nominal value.

50 ohm Corrugated Copper-tube Outer Conductor Coaxial Cables

Fire retardant Jacket: HCTAYZ-50-22 (7/8"Retardant)

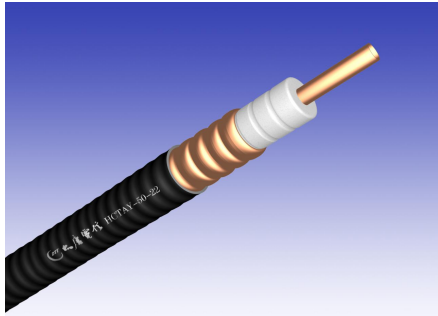

7/8" Flexible Coaxial Cable

Characteristics

Low Attenuation, low VSWR,
 High expansion, high power rating,
 Excellent environmental performance
 and Mechanical Performance.

7/8" fire retardant cable fulfills the
 requirements of CPR Class B2ca-s1-d1-a1

Construction

Inner conductor	
Smooth Copper-tube	
Diameter (mm)	9.00±0.10
Insulation	
3 layers of Insulation	Foam PE
Diameter (mm)	22.40±0.40
Outer conductor	
Corrugated Copper-tube	
Diameter over copper	
Outer conductor (mm)	24.90±0.30
Jacket	
Thickness (mm)	1.20±0.20
Diameter (mm)	27.30±0.30

Electrical Performance

Impedance (Ω)	50±1		
Capacitance (pF/m)	75		
Inductance (uH/m)	0.19		
Velocity (%)	89		
Dc Breakdown, volts (V)	≥6000		
Peak Power(kW)	90		
Shielding Effectiveness (dB)	≥120		
Insulation Resistance(MΩ.km)	10000		
Cut-off Frequency (GHz)	5.0		
Frequency (MHz)	Return Loss(dB)	Attenuation (dB/100m)	Average Power (kW)
150 MHz	21.5	1.47	6.12
450 MHz	21.5	2.64	3.41
800 MHz	23	3.62	2.48
900 MHz	23	3.86	2.34
1800 MHz	23	5.73	1.57
2000 MHz	23	6.09	1.48
2500 MHz	23	6.94	1.24
3000 MHz	21	7.74	1.16
3400 MHz	21	8.33	1.08
3600 MHz	21	8.62	1.06
3700 MHz	21	8.76	1.04
3800 MHz	21	8.90	1.02
4000 MHz	19	9.18	0.98
4800 MHz	19	10.26	0.86
4900 MHz	19	10.39	0.86
5000 MHz	19	10.52	0.85

Seisen S. L.

C/ Rafael Pillado N°30

Bloque 3, nave 10, Polígono Industrial Río de Janeiro

28 010 Madrid, Spain

Telf.: + 34 91 653 21 75

Fax: + 34 91 654 53 93



Engineering data	
Minimum Bending Radius (mm)	
Single Bending	120
Multiple Bending	250
Number of bends	15
Temperature range (°C)	
Standard jacket	-40~+70
Fire Retardant Jacket	-25~+70

Standard Conditions:

For attenuation: VSWR 1.0, cable temperature 20°C

For average power: VSWR 1.0, ambient temperature 40°C

Inner conductor temperature 100°C. No solar loading.

Maximum return loss and attenuation value shall be 105% of the nominal value.

Seisen S. L.

C/ Rafael Pillado N°30

Bloque 3, nave 10, Polígono Industrial Río de Janeiro

28 010 Madrid, Spain


Telf.: + 34 91 653 21 75

Fax: + 34 91 654 53 93



50 ohm Corrugated Copper-tube Outer Conductor Coaxial Cables

Normal Jacket: HCTAY-50-22 (7/8")

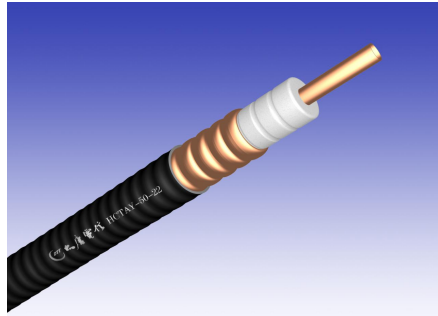

7/8" Flexible Coaxial Cable

Characteristics

Low Attenuation, low VSWR,
High expansion, high power rating,
Excellent environmental performance
and Mechanical Performance.

Construction

Inner conductor	
Smooth Copper-tube	
Diameter (mm)	9.00±0.10
Insulation	
3 layers of Insulation	
Foam PE	
Diameter (mm)	22.40±0.40
Outer conductor	
Corrugated Copper-tube	
Diameter over copper	
Outer conductor (mm)	24.90±0.30
Jacket	
Thickness (mm)	
1.20±0.20	
Diameter (mm)	27.30±0.30

Electrical Performance

Impedance (Ω)	50±1		
Capacitance (pF/m)	75		
Inductance (uH/m)	0.19		
Velocity (%)	89		
Dc Breakdown, volts (V)	≥6000		
Peak Power(kW)	90		
Shielding Effectiveness (dB)	≥120		
Insulation Resistance(MΩ.km)	10000		
Cut-off Frequency (GHz)	5.0		
Frequency (MHz)	Return Loss(dB)	Attenuation (dB/100m)	Average Power (kW)
150 MHz	21.5	1.47	6.12
450 MHz	21.5	2.64	3.41
800 MHz	23	3.62	2.48
900 MHz	23	3.86	2.34
1800 MHz	23	5.73	1.57
2000 MHz	23	6.09	1.48
2500 MHz	23	6.94	1.24
3000 MHz	21	7.74	1.16
3400 MHz	21	8.33	1.08
3600 MHz	21	8.62	1.06
3700 MHz	21	8.76	1.04
3800 MHz	21	8.90	1.02
4000 MHz	19	9.18	0.98
4800 MHz	19	10.26	0.86
4900 MHz	19	10.39	0.86
5000 MHz	19	10.52	0.85

Seisen S. L.

C/ Rafael Pillado N°30

Bloque 3, nave 10, Polígono Industrial Río de Janeiro

28 010 Madrid, Spain

Telf.: + 34 91 653 21 75

Fax: + 34 91 654 53 93



Engineering data	
Minimum Bending Radius (mm)	
Single Bending	120
Multiple Bending	250
Number of bends	15
Temperature range (°C)	
Standard jacket	-40~+70
Fire Retardant Jacket	-25~+70

Standard Conditions:

For attenuation: VSWR 1.0, cable temperature 20°C

For average power: VSWR 1.0, ambient temperature 40°C

Inner conductor temperature 100°C. No solar loading.

Maximum return loss and attenuation value shall be 105% of the nominal value.